


M1000 SERIES

Lifting Capacity: 1,000 lbs.
Boom Length: 5 ft.

Featuring a **unique**, lightweight and low profile design, for mounting on top of utility bed boxes or for other low profile applications (custom pedestal heights also available - see "Options" list on reverse side).

Very **compact**, weighing only 117 lbs. installed. Features a Gas Spring lift assisted boom.



A **versatile** design with 12V-DC, 120V-AC or Manual Hand Crank operated models.

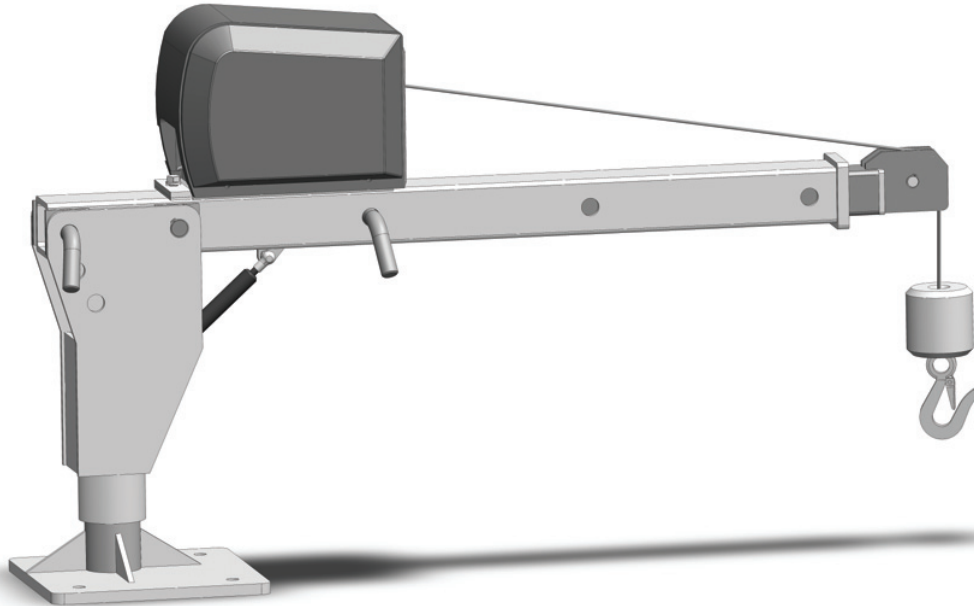

- ▶ 1000 lbs. Max. Lifting Capacity
- ▶ Gas Spring Lift Assisted Boom
- ▶ Three Boom Elevation Angles: 0°, 20°, 40° raised manually with Gas Spring Lift Assist
- ▶ Three Position Telescoping Boom: 40", 50" & 60" extended manually
- ▶ 360° Manual Rotation on a Sealed Thrust Bearing
- ▶ Rotation Hand Brake
- ▶ Three models powered by either a 12V-DC, 120V-AC or Manual Hand Crank Winch
- ▶ 10' Remote Pendant Control
- ▶ 20' x 3/16" Lifting Cable w/Hook
- ▶ Detachable Power Cable
- ▶ Durable White Powder Coat Finish
- ▶ 1-Year Warranty (excluding lifting cable)


Optional mast heights, mounting bases, and custom configurations also available.

R217

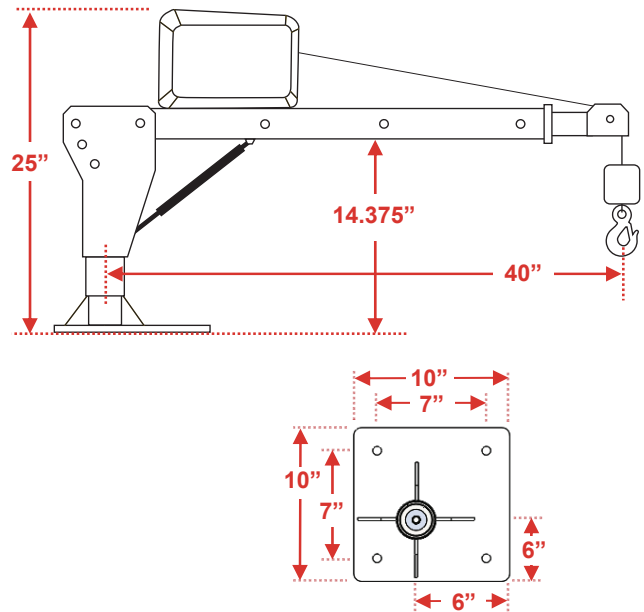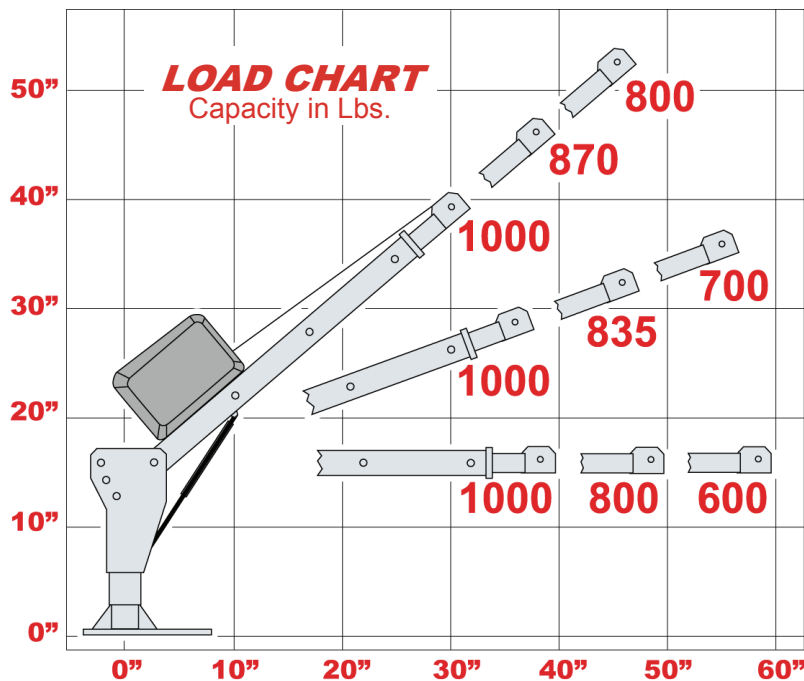

OPTIONS

Part #	Description
WA-26	Boom Rest
WO-22	50' x 3/16" Lifting Cable (upgrade from 20')
WO-34	Fold-Down Adjustable Outrigger
WO-39	Wireless Remote Control
WO-8122	Taller Pedestal for Pickup Box Installation
WO-8126	Custom Pedestal Height, Specify Height

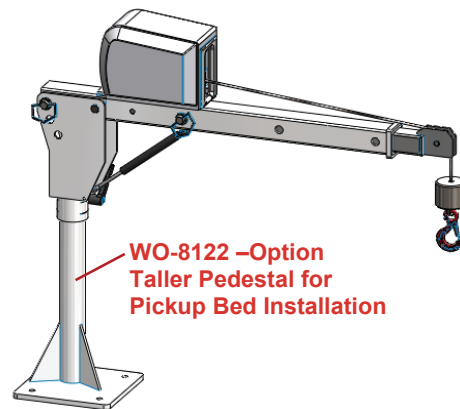

STANDARD FEATURES

MODEL:	M1000-DC	M1000-AC	M1000-MN
Lifting Capacity (maximum)	1000 lbs.	1000 lbs.	1000 lbs.
Lifting Height Max. Std. (base to hook)	47"	47"	47"
Storage Height Folded (from base)	25"	25"	25"
Boom Maximum Reach	60"	60"	60"
Boom Angles	0°, 20°, 40°	0°, 20°, 40°	0°, 20°, 40°
Rotation (continuous) with Brake	360° Manual	360° Manual	360° Manual
Lifting Cable	20' x 3/16"	20' x 3/16"	20' x 3/16"
Line Speed (feet/min) No Load / Load	16 / 6	17 / 8	Manual Crank
Power Requirements	12 VDC 70 amps	120 VAC 6 amps	Manual
Controls	10' Remote (Detachable)	10' Remote	N/A
Mounting Base	10" x 10"	10" x 10"	10" x 10"
Mounting Bolt Hole Pattern	7" x 7"	7" x 7"	7" x 7"
Finish	White Powder-Coat	White Powder-Coat	White Powder-Coat
Weight of Crane / Shipping Weight (Lbs)	117 / 155	117 / 155	106 / 139
Warranty (excluding lifting cable)	1-Year	1-Year	1-Year

We reserve the right under the Product Improvement Policy to change specifications without notice or reference to specification used herein.

R217

WESTERN MULE CRANES 1510 Merced St. Fresno, CA USA
Ph: (800)288-6853, (559)266-6977 ♦ Fax: (559)266-7437 ♦ www.westernmule.com



Available at Contractor's Solutions <https://www.contractors-solutions.net>



M-15R

M-20R

M-15R: 1,500 Lbs. Maximum

M-20R: 2,000 Lbs. Maximum

www.westernmule.com

The Western Mule M-15R & M-20R Telescoping Boom Cranes are designed and engineered for safety, ease of operation and low maintenance. Enabling you to do your work **faster and safer** while reducing the risk of injury.

STANDARD FEATURES- include a 12V-DC winch powered by the vehicles electric system, and is circuit breaker protected. Controlled by a weatherproof, 10-foot detachable control pendant, powered up and down.



COMPACT- folds and stores below cab height when mounted on a pickup.

LOW MAINTENANCE- environmentally sealed bearings and winch reduces maintenance.

ECONOMICAL- a small equipment investment will increase your efficiency and add value to the vehicle.

VERSATILE- the crane is ideally suited for mounting on pickups, service bodies, flat beds and loading docks. Custom pedestal heights available.

LIGHTWEIGHT- strong, lightweight, and yet requires only a minimum amount of bed space for mounting.



- ▶ 12V-DC Powered
- ▶ 10' Remote Pendant
- ▶ 360° manual rotation
- ▶ Boom Length 52"-72"
- ▶ 15 Position Adjustable Boom
 - 3 Boom Extensions
 - 5 Elevations
- ▶ Powder Coat Finish –Lt Gray
- ▶ 1-Year Warranty



Optional mast heights and custom configurations also available.

R217



1510 Merced St. Fresno, CA USA ♦ Ph: (800)288-6853, (559)266-6977 ♦ Fax: (559)266-7437 ♦ www.westernmule.com

Available at Contractor's Solutions <https://www.contractors-solutions.net>

OPTIONS

Part #	Description
WO-14	Rotation Lock
WA-26	Boom Rest
WO-34	Fold-Down Adjustable Outrigger
WO-39	Wireless Remote Control
	Optional Stainless Steel Cable
	Optional Cable Length
	Optional Pedestal Height

(Specify when ordering)

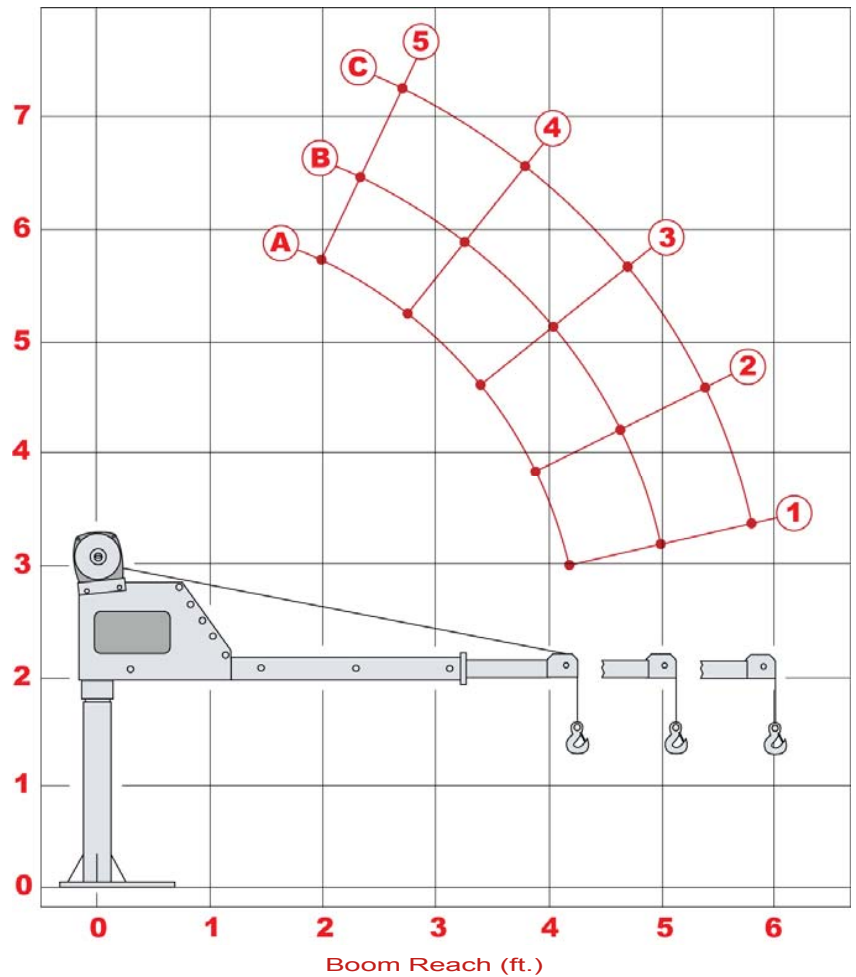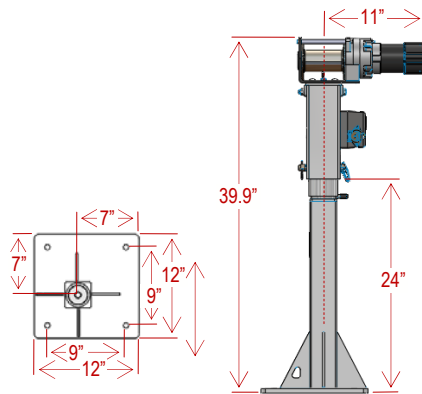

Optional pedestal heights, mounting bases, and custom configurations available.

STANDARD FEATURES

MODEL:	M-15R	M-20R
Max. Lifting Capacity	1500 lbs.	2000 lbs.
Winch Power	12V-DC, 80 Amp Max.	12V-DC, 80 Amp Max.
Circuit Breaker	Included	Included
Boom Maximum Reach	72"	72"
Boom Extension	3-Positions	3-Positions
Boom Angles	0°, 20°, 40°, 60°	0°, 20°, 40°, 60°
Rotation	360° Manual	360° Manual
Bearings	3 Bearings	3 Bearings
Lifting Cable	25' x 3/16"	25' x 7/32"
Control	10' Remote (Detachable)	10' Remote (Detachable)
Mounting Base	12" x 12" (9" x 9" Bolt Space)	12" x 12" (9" x 9" Bolt Space)
Finish	Lt. Gray Powder-Coat	Lt. Gray Powder-Coat
Weight of Crane/Ship Weight	190 / 225 lbs.	205 / 235 lbs.
Warranty (excluding lifting cable)	1-Year	1-Year

LOAD CHARTS

M-15R			
Boom Position	A	B	C
5	1500	1350	1065
4	1500	1215	950
3	1250	1045	805
2	1100	865	660
1	950	695	525

M-20R			
Boom Position	A	B	C
5	2000	1800	1420
4	2000	1620	1265
3	1750	1395	1075
2	1500	1155	880
1	1280	995	695

Capacity in Lbs.

We reserve the right under the Product Improvement Policy to change specifications without notice or reference to specification used herein.

R217

WESTERN MULE CRANES 1510 Merced St. Fresno, CA USA

Ph: (800)288-6853, (559)266-6977 ♦ Fax: (559)266-7437 ♦ www.westernmule.com

© 2017 Western Mule Cranes

Available at Contractor's Solutions <https://www.contractors-solutions.net>



TM

SINCE 1982

www.westernmule.com

MODEL: M2000

Lifting Capacity: 2,000 lbs.

FEATURES

- ▶ Gas Spring Lift-Assisted Boom
- ▶ 2,000 lbs. Maximum Lifting Capacity
- ▶ Low Profile Design
- ▶ 12 Position Manually Adjustable Boom
- ▶ 6' Horizontal Boom Reach
- ▶ 360° Manual Rotation
- ▶ Positive Rotation Lock - 12 Fixed Points



- ▶ 12V-DC Powered, Up/Down, with Dual Internal Braking
- ▶ Double-Line, 35' x 3/16" Galvanized Aircraft Cable and Safety Hook
- ▶ 10' Detachable Remote Pendant Control
- ▶ Light-Gray Powder Coat Finish
- ▶ 1-Year Warranty



*Shown above with Tall Pedestal for Pickup Bed Mounting (WO-8022).
Custom Pedestal Heights (WO-8026) and custom configurations available.*

R217



1510 Merced St. Fresno, CA USA ♦ Ph: (800)288-6853, (559)266-6977 ♦ Fax: (559)266-7437 ♦ www.westernmule.com

Available at Contractor's Solutions <https://www.contractors-solutions.net>

Load Chart

Boom Position	A	B	C
4	2000	1900	1750
3	1775	1625	1450
2	1500	1375	1175
1	1350	1125	900

Capacity in Lbs.

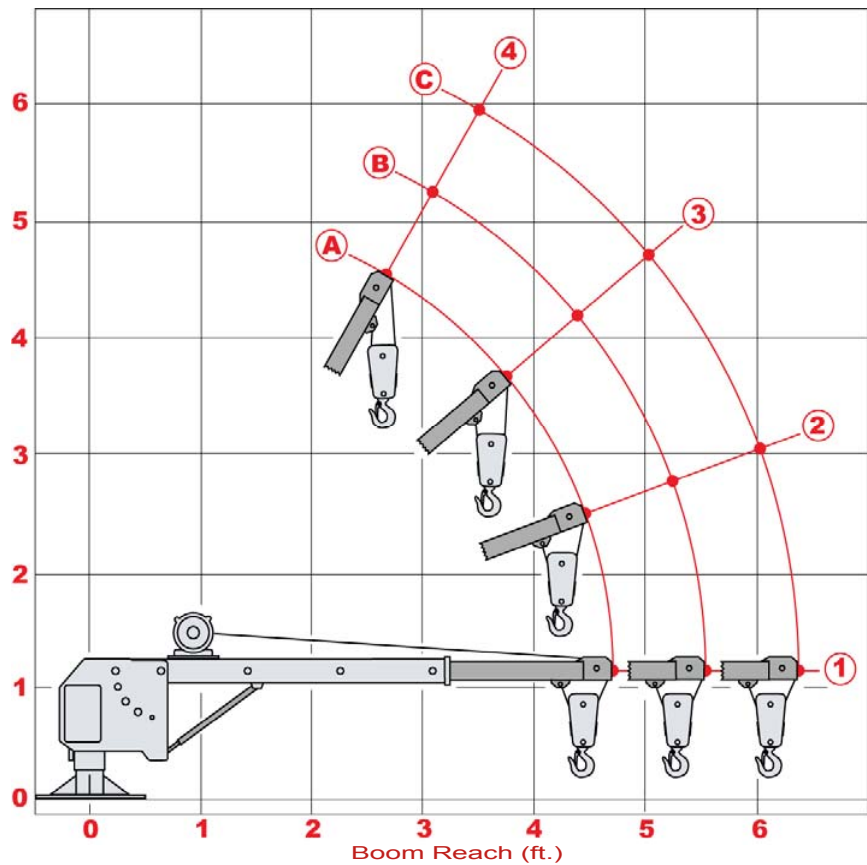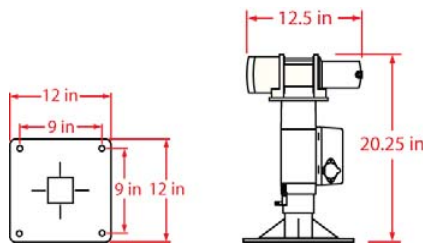


SPECIFICATIONS

Lifting Capacity (maximum)	2,000 lbs.
Power Requirements	12V-DC, 80 Amp Max.
Circuit Breaker	Included
Boom Maximum Reach	72"
Boom Extension	3-Positions
Boom Angles	0°, 20°, 40°, 60°
Rotation	360° Manual
Rotation Lock	12-Position
Bearings	3 Bearings
Lifting Cable	35' x 3/16" (Double-line)
Control	10' Remote (Detachable)
Mounting Base	12" x 12" (9" x 9" bolt space)
Finish	Lt. Gray Powder-Coat
Weight of Crane / Ship Weight	205 / 245 lbs.
Warranty (excludes lifting cable)	1-Year

OPTIONS

Part #	Description
WA-26	Boom Rest
WO-34	Fold-Down Adjustable Outrigger
WO-39	Wireless Remote Control
WO-8022	Taller Pedestal for Pickup Bed Install
WO-8026	Custom Pedestal Height

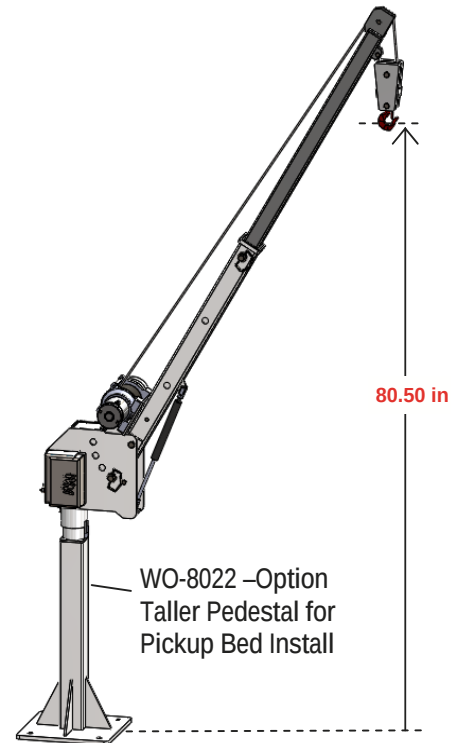

We reserve the right under the Product Improvement Policy to change specifications without notice or reference to specification used herein.

R217

WESTERN MULE CRANES 1510 Merced St. Fresno, CA USA

Ph: (800)288-6853, (559)266-6977 ♦ Fax: (559)266-7437 ♦ www.westernmule.com



Available at Contractor's Solutions <https://www.contractors-solutions.net>